

RT16(NT)

系列有填料封闭管式刀型触头熔断器




一、适用范围

RT16 (NT) 系列低压熔断器具有体积小、重量轻、分断能力高等特点，广泛用于电气设备的过载保护和短路保护。

产品符合GB/T13539.1 GB/T13539.2标准。

二、型号及含义

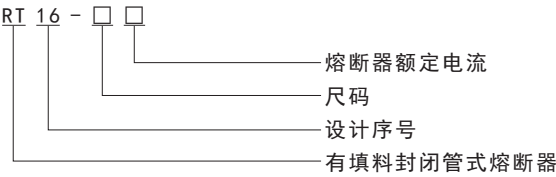

三、主要技术参数

熔断器额定分断能力：500V：COSΦ0.1~0.2为120KA；660V：COSΦ0.1~0.2为50KA。

尺码	额定电流 (A)	额定电压 (V)		额定功率 (KW)	重量 (Kg)
1	80	380 500	660	6.20	0.36
	100			7.50	
	125			10.2	
	160			13.0	
	200			15.2	
	224			16.8	
	250			18.3	
2	125	380 500	660	9.00	0.65
	160			11.5	
	200			15.0	
	224			16.0	
	250			18.4	
	300			21.0	
	315			19.2	
	355			24.5	
3	400	380 500	660	26.0	0.85
	315			27.1	
	355			22.7	
	400			26.8	
	425			28.9	
	500			32	
4	630	500 660		40.3	1.2
	800			90	
0	1000	500 660			0.2
	4			1.03	
	6			1.42	
	10			2.45	
	20			2.36	
	25			2.70	
	32			3.74	
	36			4.30	
	40			4.70	


RT16(NT)

系列有填料封闭管式刀型触头熔断器

尺码	额定电流(A)	额定电压(V)	额定功率(KW)	重量(Kg)
0	50	500 660	5.50	0.2
	63		6.90	
	80		7.60	
	100		8.90	
	125		10.1	
	160		15.2	
00C	4	380 500	0.67	0.12
	6		0.89	
	10		1.14	
	16		1.65	
	20		1.94	
	25		2.50	
	32		3.32	
	36		3.56	
	40		4.30	
	50		4.50	
	63		4.60	
	80		6.00	
	100		7.30	
00	4	380 500	0.67	0.15
	6		0.89	
	10		1.14	
	16		1.65	
	20		1.94	
	25		2.50	
	32		3.32	
	36		3.56	
	40		4.30	
	50		4.50	
	63		4.60	
	80		6.00	
	100		7.30	
	125		7.80	
	160		9.60	

四、外形及安装尺寸

1、熔断体尺寸图

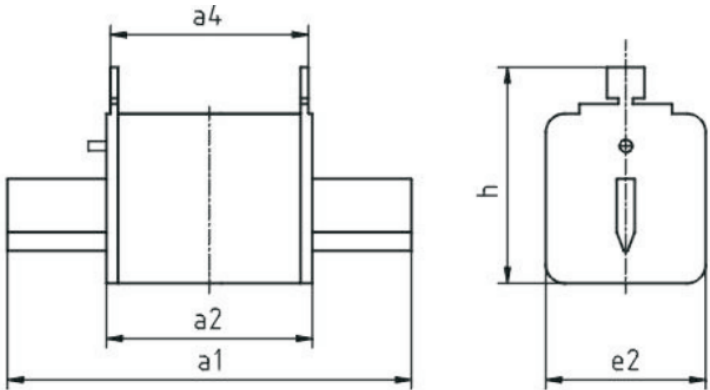


RT16(NT)

系列有填料封闭管式刀型触头熔断器

尺码	a1	a2	a4	e2(max)	h(max)
00	78.5	54	49	30	60
0	125	68	68	40	61
1	135	75	68	52	66
2	150	75	68	60	74
3	150	75	68	75	89
4	200	80	87	84	109

2、熔断体配用的熔断器底座尺寸图

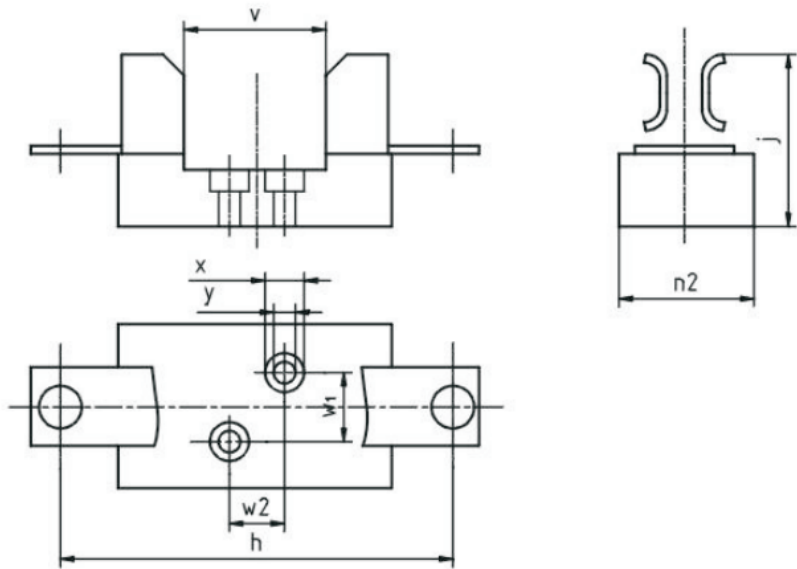

尺码	h	v	n2	j	w1	w2	ΦX	ΦY
00	100	56.5	38	61	0	25	14	7.5
0	150	74	48	73	0	25	14	7.5
1	175	80	60	93	30	25	20	10.5
2	200	80	68	106	30	25	20	10.5
3	210	80	83	126	30	25	20	10.5
4	260	106	88	143	45	30	24	10.5